

AUSTIN SERVALL

CONCRETE



Quality concrete is important to both of us. So is the cost of getting it in place. To facilitate placement, we have rear-mounted conveyor systems on two of our trucks.



With a range of 39 feet and 310° of rotation, we can provide **FAST, EFFICIENT, and CONVENIENT** concrete placement.

To make your job easier and reduce your overall concrete cost, call us at **814-456-2901** to schedule your next job.

Perfect for use when placing:

- Columns
- Slabs
- Foundations
- Walls
- Block-Fill
- Above / Below Grade



1919 Reed Street · PO Box 1438 · Erie, PA 16512

Phone: (814) 456-2901

www.austinservallconcrete.com


Fax: (814) 455-6861

AUSTIN SERVALL CONCRETE

Quality Concrete Since 1930

DISCHARGE CAPACITY

Maximum discharge rate is 85 cu/yd per hour. The graph below shows approximate Discharge Capacities at varying heights and slumps when the conveyor is fed non-stop. Above slump 6, the design of the mix increasingly influences rates.

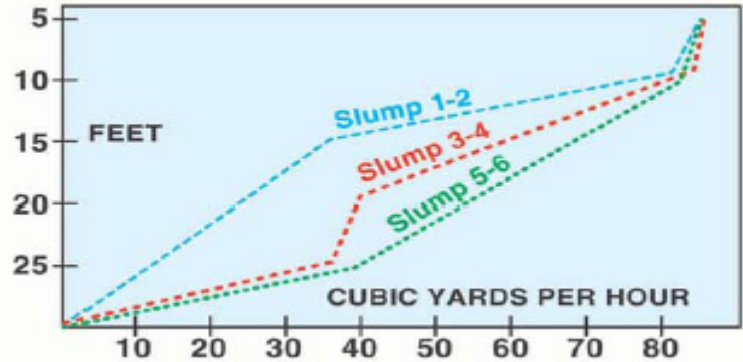

PLACING RANGE

Maximum discharge height	25 ft
Maximum horizontal discharge length	39 ft.
Maximum conveyor rotation	310°

Remember...There is no efficiency without SAFETY!




KNOW AND USE PROPER SIGNALS




DRIVE IN




BACK IN




BACK UP



PULL FORWARD



STOP



RAISE CONVEYOR



START
POURING




MORE WATER



STOP POURING



MOVE CONVEYOR
RIGHT



MOVE CONVEYOR
LEFT

CONVEYOR SAFETY CHECK

- ▶ Follow conveyor operator's instructions.
- ▶ Know and use proper signals (shown at left).
- ▶ Make sure your signals have been understood.
- ▶ Signal operator to stop concrete flow, do not squeeze discharge truck. This may cause overload.
- ▶ Do Not stand or pass under the conveyor.
- ▶ Secure your balance. Do not hang or hold onto the conveyor.
- ▶ Beware of boom, pivot, and belt rotation.
- ▶ Keep clear of pinch points.
- ▶ Never plan for conveyor use in close proximity to electric lines. The conveyor is not insulated.
- ▶ Provide conveyor operator with a safe, convenient wash-down area.
- ▶ Wear hard hats and avoid loose clothing.
- ▶ Warn conveyor operator of weak banks.
- ▶ If unsafe conditions exist, contact our RM management.

1919 Reed Street · PO Box 1438 · Erie, PA 16512

Phone: (814) 456-2901

www.austinservallconcrete.com

Fax: (814) 455-6861